



## Key Features

Bright Images in any Environment | Large Images in Small Spaces |  
 Horizontal and Vertical Keystone Correction | SonicExpert/SonicMode |  
 PortAll



## Product Description


Featuring 1024x768 XGA resolution and 3,300 lumens of brightness, the ViewSonic® PS700X ultra-short throw projector is an ideal projection solution for education environments. An ultra-short throw lens enables the projector to be placed just inches away from a wall or screen, making it flexible enough to be ceiling-mounted or simply placed on the tabletop. With horizontal/vertical keystoneing, the PS700X makes installation a hassle-free experience. PortAll®, a neatly designed and enclosed HDMI/MHL dongle compartment, features an integrated micro USB cable for easy charging – allowing teachers to present interesting lesson content via wireless dongles and PC sticks. Crestron and AMX certification delivers network management capabilities, while exclusive SuperColor™ technology offers a wider color range for true-to-life images in any classroom.

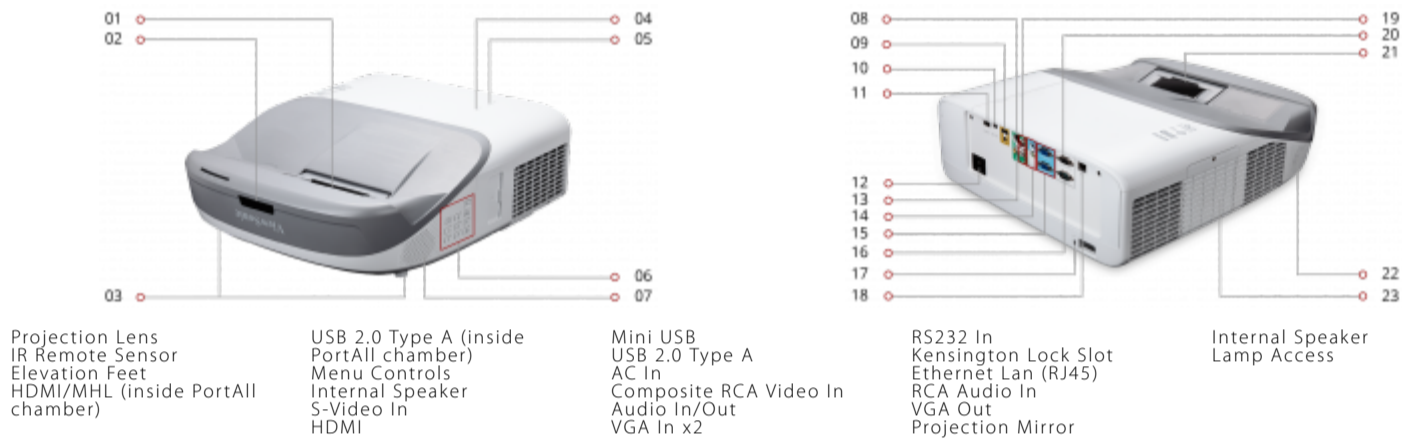

1024 x 768  
**RESOLUTION**



3,300 ANSI  
**LUMENS**



0.29  
**THROW RATIO**

### Contact Sales

- call: 888.881.8781
- email: salesinfo@viewsonic.com
- visit: viewsonic.com

**Display:**

Type:	DLP Lamp
Resolution Type:	XGA (1024x768)
Resolution:	1024 x 768
Brightness (Lumens):	3,300 ANSI
Display Size (in.):	78 - 100
Throw Distance:	0.4 - 0.8 ft / 0.1 - 0.2 m
Throw Ratio:	0.29
Keystone:	Vertical (± 30°) / Horizontal (± 30°)
Lens:	Fixed Zoom
Light Source (watt):	240
Light Source Life, Normal (hours):	3000
Light Source Life, Dynamic Eco-Mode (hours):	7500
Color Depth:	1.07B Color (R/G/B 10bit)
Dynamic Contrast Ratio:	10,000:1
Aspect Ratio:	4:3

**Video Signal:**

Frequency Horizontal:	15K~102KHz
Frequency Vertical:	23~120Hz

**Compatibility:**

PC Resolution (max):	1920 x 1200
PC Resolution (min):	640 x 480
Mac® Resolution (max):	1920 x 1200
Mac® Resolution (min):	640 x 480

**Connector:**

USB 2.0 Type A(2), Ethernet LAN (RJ45)(1), 3.5mm Audio Out(1), 3.5mm Audio In(1), Control (RS232)(1), HDMI(2), HDMI 1.4 (with HDCP 1.4)(1), VGA In(2), VGA Out(1), Composite RCA Video In(1), S-Video In(1), Mini USB(1), RCA Audio In (L/R)(1)

**Power:**

Voltage:	100-240V+/- 10%, 50/60Hz AC
Consumption (typical):	410W
Stand-by:	<0.5W

**Operating Conditions:**

Temperature:	32-104° F (0 - 40° C)
Humidity (non-condensing):	0-90%

**Additional Hardware:**

Kensington Lock Slot:	1
-----------------------	---

**Weight (imperial):**

Net (lbs):	13.4
Gross (lbs):	18.7

**Weight (metric):**

Net (kg):	6.1
Gross (kg):	8.5

**Dimensions (imperial) (WxHxD):**

Packaging (in.):	23.2 x 19.7 x 10.8
Physical (in.):	17.1 x 15.3 x 6.0

**Dimensions (metric) (WxHxD):**

Packaging (mm):	590.0 x 500.0 x 275.0
Physical (mm):	434.0 x 388.0 x 153.0

**General:**

AV Control: AMX Certified, ATEN Certified, Crestron Certified, Extron Certified, PJ Link Certified

Regulations: FCC, cTUVus, ROHS

PACKAGE CONTENTS: PS700X Projector, Power Cable, VGA Cable, Remote Control, Quick Start Guide

Warranty: Three-year limited warranty on parts and labor, 1-year limited warranty on lamp, 1st year free Express Exchange® service. (One year Express Exchange Service requires product registration).

Recycle/Disposal: Please dispose of in accordance with local, state or federal laws.

UPC: 766907904314

**Accessories:**

HB10B, PGD-350, PJ-SCW-1001W, PJ-WMK-304, RLC-107, VC10, VCB10