

## Key Features

SuperColor: Amazing Color Accuracy | 3,600 Lumen Brightness | Energy Efficient SuperEco | Reduced Input Latency



## Product Description


The ViewSonic® PA503W price-performance projector features 3,600 lumens, native WXGA 1280x800 resolution, and an intuitive, user-friendly design. Exclusive SuperColor™ technology offers a wider color range for lifelike image projection. The PA503W also features extensive connectivity including HDMI, 2 x VGA in, Composite Video, 1 x VGA output, and Audio in/out. An energy-saving SuperEco™ feature reduces power consumption by up to 70%, and extends the lamp life by up to 15,000 hours\*. With advanced audiovisual features, flexible connectivity options, and an affordable price, the PA503W is ideal for use in education and small business environments.

\*Energy consumption and lamp life may vary based on actual usage and other factors.



01 Projection lens  
IR remote sensor  
Elevation foot  
Focus / zoom rings  
VGA x2  
HDMI

02 Audio In/Out  
AC In  
Control Panel  
Monitor Out  
Kensington  
Lock Slot

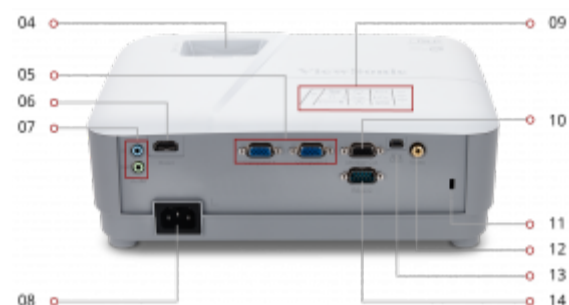


04 Video In  
USB type Mini B  
RS232



1280 x 800  
**RESOLUTION**



3,600 ANSI  
**LUMENS**



1.55~1.70  
**THROW RATIO**

### Contact Sales

- call: 888.881.8781
- email: [salesinfo@viewsonic.com](mailto:salesinfo@viewsonic.com)
- visit: [viewsonic.com](http://viewsonic.com)

**Display:**

Type:	DLP Lamp
Resolution Type:	WXGA (1280x800)
Resolution:	1280 x 800
Brightness (Lumens):	3,600 ANSI
Display Size (in.):	30 - 300 in. / 0.76 - 7.62 m
Throw Distance:	3.28 - 36.02 ft / .99 - 10.98 m
Throw Ratio:	1.55~1.70
Keystone:	Vertical (+/- 40°)
Lens:	1.1x optical zoom
Light Source (watt):	200
Light Source Life, Normal (hours):	5000
Light Source Life, Dynamic Eco-Mode (hours):	15000
Color Depth:	1.07B Color (R/G/B 10bit)
Dynamic Contrast Ratio:	22,000:1
Aspect Ratio:	16:10

**Video Signal:**

Frequency Horizontal:	15K~102KHz
Frequency Vertical:	23~120MHz

**Compatibility:**

PC Resolution (max):	VGA(640 x 480) to FullHD(1920 x 1080)
Mac® Resolution (max):	VGA(640 x 480) to FullHD(1920 x 1080)

**Connector:**

3.5mm Audio Out(1), 3.5mm Audio In(1), Control (RS232)(1), HDMI(1), VGA In(2), VGA Out(1), Composite RCA Video In(1), Mini USB(1)

**Audio:**

Internal Speakers:	2W (x1)
--------------------	---------

**Power:**

Voltage:	100-240V+/- 10%, 50/60Hz AC
Consumption (typical):	260W
Stand-by:	<0.5W

**Operating Conditions:**

Temperature:	32-104° F (0 - 40° C)
--------------	-----------------------

**Weight (imperial):**

Net (lbs):	4.9
Gross (lbs):	7.1

**Weight (metric):**

Net (kg):	2.2
Gross (kg):	3.2

**Dimensions (imperial) (WxHxD):**

Packaging (in.):	14.4 x 7.4 x 11.8
Physical (in.):	11.6 x 4.3 x 8.6

**Dimensions (metric) (WxHxD):**

Packaging (mm):	365 x 188 x 300
Physical (mm):	294 x 110 x 218

**General:**

Regulations: FCC (including ICES003), cTUVus, NOM, TUV-Rheinland S Mark

PACKAGE CONTENTS: PA503W projector, power cable, VGA cable, laser remote control with batteries, Quick Start Guide

Warranty: Three-year limited warranty on parts and labor, 1-year limited warranty on lamp, 1st year free Express Exchange® service. (One year Express Exchange Service requires product registration).

Recycle/Disposal: Please dispose of in accordance with local, state or federal laws.

UPC: 766907904918

**Accessories:**

PGD-350, PJ-CASE-008, PJ-WMK-006, PM-FCP, PRJ-EE-05-03, PRJ-EEEW-07-01 , PRJ-EEEW-07-02, PRJ-EW-07-01, PRJ-EW-07-02, RLC-109